
The evolved solution

Offering the full access solution for your flow diversion needs.

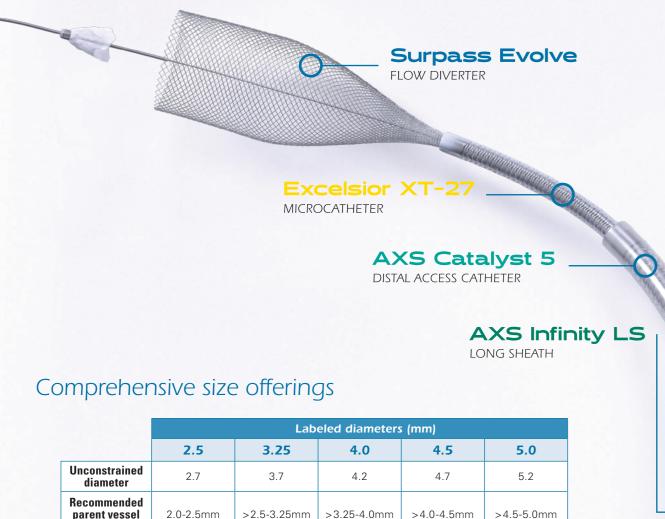

2.0-2.5mm >2.5-3.25mm >3.25-4.0mm >4.0-4.5mm >4.5-5.0mm parent vessel diameter 64 # of wires 48 12 FD45012 FD25012 FD40012 FD32512 15 FD25015 FD45015 FD50015 FD32515 FD40015 17 FD32517 FD40017 FD45017 20 FD25020 FD32520 FD40020 FD45020 FD50020 25 FD32525 FD40025 FD45025 FD50025 30 FD40030 FD45030 FD50030 40 FD45040 FD50040

Surpass Evolve[™] Flow Diverter

See package insert for complete indications, complications, warnings, and instructions for use.

INDICATIONS FOR USE

The Surpass Evolve Flow Diverter System is indicated for use for the treatment of saccular or fusiform intracranial aneurysms arising from a parent vessel with a diameter \geq 2.0mm and \leq 5.0mm.

Excelsior[™] XT-27[™] Microcatheter

See package insert for complete indications, complications, warnings, and instructions for use.

INTENDED USE / INDICATIONS FOR USE

Stryker Neurovascular Excelsior XT-27 Microcatheter is intended to assist in the delivery of diagnostic agents (such as contrast media), therapeutic agents, and non-liquid interventional devices (such as stents) that are indicated for use in the neurovasculature and with a catheter of 0.027 inches in inner diameter.

AXS Infinity LS[™] Long Sheath

See package insert for complete indications, contraindications, warnings and instructions for use.

INTENDED USE/INDICATIONS FOR USE

The AXS Infinity LS Long Sheath is indicated for the introduction of interventional devices into the peripheral, coronary, and neuro vasculature.

AXS Catalyst[™] Distal Access Catheter See package insert for complete indications, complications, warnings, and instructions for use.

The AXS Catalyst Distal Access Catheter is indicated for use in facilitating the insertion and guidance of appropriately sized interventional devices into a selected blood vessel in the peripheral and neurovascular systems. It is also indicated for the removal/aspiration of soft emboli and thrombi from vessels in the peripheral and neurovasculature.

Stryker Corporation or its divisions or other corporate affiliated entities own, use or have applied for the following trademarks or service marks: AXS Catalyst, AXS Infinity LS, Excelsior, Stryker, Surpass Evolve, Surpass Streamline, XT-27. All other trademarks are trademarks of their respective owners or holders.

Copyright © 2019 Stryker AP002373 v3.0

Surpass Streamline[™] Flow Diverter

for use.

See package insert for complete indications, contraindications, warnings and instructions

INTENDED USE / INDICATIONS FOR USE

The Surpass Streamline Flow Diverter is indicated for use in the endovascular treatment of patients (18 years of age and older) with unruptured large or giant saccular wide-neck (neck width ≥ 4 mm or dome-to-neck ratio < 2) or fusiform intracranial aneurysms in the internal carotid artery from the petrous segment to the terminus arising from a parent vessel with a diameter ≥ 2.5 mm and ≤ 5.3 mm.

INTENDED USE/INDICATIONS FOR USE

THIS DOCUMENT IS INTENDED SOLELY FOR THE USE OF HEALTHCARE PROFESSIONALS.

A physician must always rely on his or her own professional clinical judgment when deciding whether to use a particular product when treating a particular patient. Stryker does not dispense medical advice and recommends that physicians be trained in the use of our particular product before using be trained in the use of any particular product before using it in a procedure. The information presented is intended to demonstrate the breadth of Stryker product offerings. A physician must always refer to the package insert, product abel and/or instructions for use before using any Stryker product. Products may not be available in all markets because product availability is subject to the regulatory and/or medical practices in individual markets. Please contact your Stryker representative if you have questions about the availability of Stryker products in your area. The Stryker products listed above are CE marked according to the Medical Device Directive 93/42/EEC.

stryker

Control defined.



AUS Australian Sponsor Address Stryker Australia Pty Ltd 8 Herbert Street St Leonards, NSW 2065 Australia



Stryker Neurovascular 47900 Bayside Parkway Fremont, CA 94538 strykerneurovascular.com

Date of Release: APR/2019 EX_EN_IL

Surpass Evolve™ FLOW DIVERTER

Surpass Evolve™ FLOW DIVERTER


Smooth delivery

Enhanced design

The Surpass Evolve Flow Diverter delivery wire is engineered to optimize flexibility, trackability and responsiveness, allowing for a smooth and controlled user experience, start to finish.


Lower push force

The flexibility profile of the solid core wire is designed to match anatomy and partner with Excelsior XT-27 Microcatheter Standard Straight, for lower friction forces, even in highly tortuous vessels.

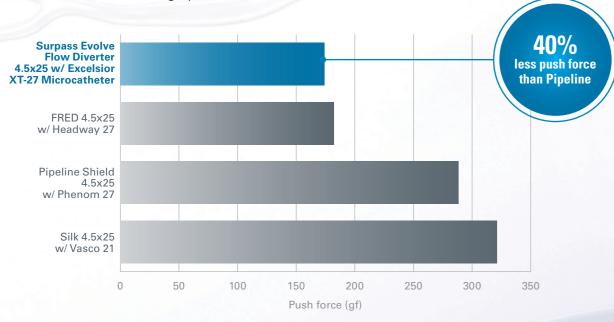

Consistent opening

Engineered to maintain the radial pressure of Surpass Streamline Flow Diverter for reliable implant opening, distal to proximal.

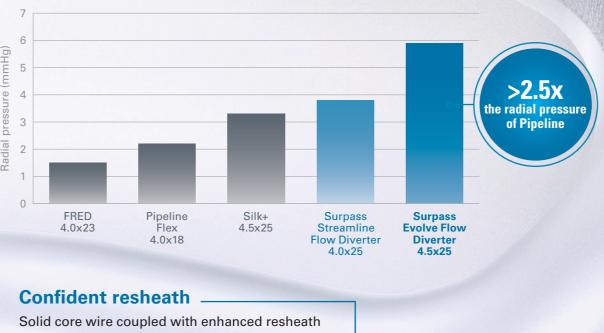

pad allows for 1:1 responsiveness and control.


Testing performed by Stryker. Data on file at Stryker. Bench test results may not necessarily be indicative of clinical performance

Reliable deployment

Optimized diversion

Mesh density

Despite having fewer wires, Surpass Evolve Flow Diverter maintains the high mesh density of Surpass Streamline Flow Diverter by optimizing the braid angle.

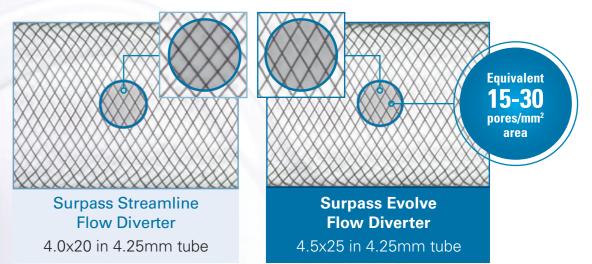

Uniform wall apposition

The higher braid angle was chosen to enhance implant opening, conformability and vessel wall apposition.




Image courtesy of Dr. Vitor Mendes Pereira, Toronto Western Hospital

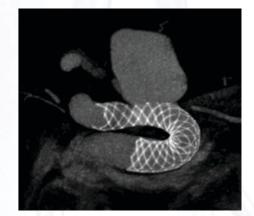


Image courtesy of Dr. Timo Krings, Toronto Western Hospital.